



VERLUISANT LIGHTING

COMMERCIAL DOWNLIGHT SERIES




Luminaire Structure

- Die-casting aluminium housing with powder coating
- Die-casting aluminium heat sink with excellent thermal management
- Remote driver is included
- Long life span up to 30,000hrs

Ring Color




Angle Parameter

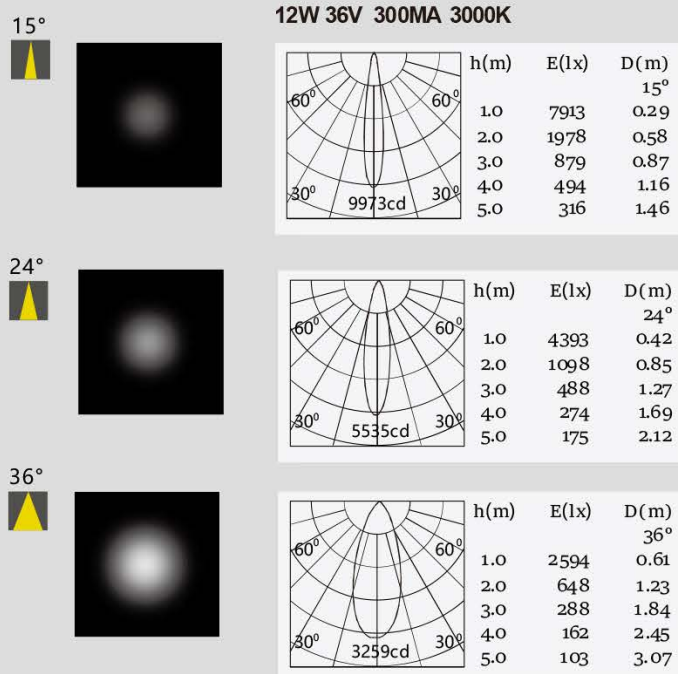


Reflector:



Technical information

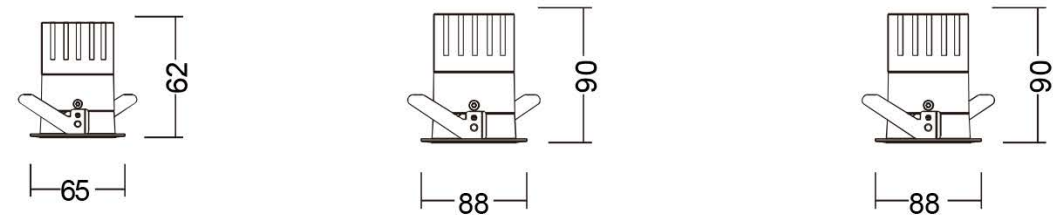

Item Number:	206550	207550	207550
Light source:	SANAN COB	SANAN COB	SANAN COB
Power:	5W	7W	12W
Size:	Φ65*62mm	Φ88*90mm	Φ88*90mm
Cutout:	Φ55mm	Φ75mm	Φ75mm
Beam Angle:	15/24/36°	15/24/36°	15/24/36°
Color Temperature:	2700/3000/3500/4000K	2700/3000/3500/4000K	2700/3000/3500/4000K
Color Rendering Index:	95	95	95
Operating Temperature:	-10~45°C	-10~45°C	-10~45°C
Input:	AC220V	AC220V	AC220V
Output:	300mA/21~23V	300mA/23V	300mA/36~39V







Luminaire Structure

- Die-casting aluminium housing with powder coating
- Die-casting aluminium heat sink with excellent thermal management
- Remote driver is included
- Long life span up to 50,000hrs


Ring Color



Technical information

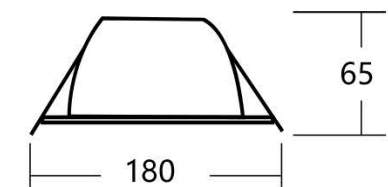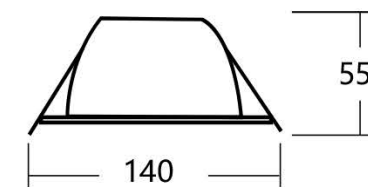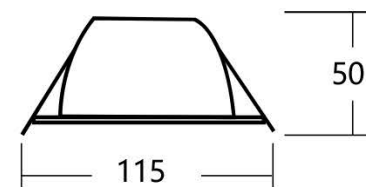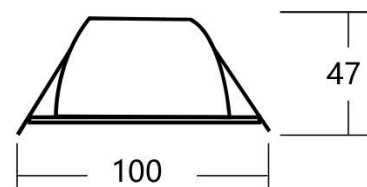

Item Number:	VLM25	VLM35	VLM40	VLM60
Light source:	SMD	SMD	SMD	SMD
Power:	7W	10W	15W	20W
Size:	Φ100*H47mm	Φ115*H50mm	Φ140*H55mm	Φ180*H65mm
Cutout:	Φ75mm	Φ95mm	Φ110mm	Φ140mm
Beam Angle:	100°	100°	100°	100°
Color Temperature:	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K
Color Rendering Index:	80/90	80/90	80/90	80/90
Operating Temperature:	-10~45°C	-10~45°C	-10~45°C	-10~45°C
Input:	AC220V	AC220V	AC220V	AC220V
Output:	125mA/48V	200mA/60V	200mA/72V	250mA/90V







Luminaire Structure

- Die-casting aluminium housing with powder coating
- Die-casting aluminium heat sink with excellent thermal management
- Remote driver is included
- Long life span up to 50,000hrs

Ring Color



Technical information

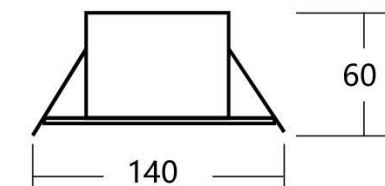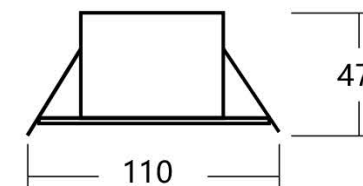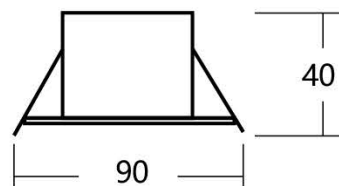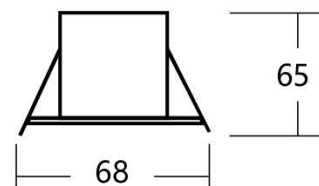

Item Number:	VLJ05	VLJ07	VLJ12	VLJ18
Light source:	COB	COB	COB	COB
Power:	5W	7W	12W	18W
Size:	Φ68*H65mm	Φ90*H40mm	Φ110*H47mm	Φ140*H60mm
Cutout:	Φ55mm	Φ75mm	Φ95mm	Φ120mm
Beam Angle:	36°	36°	36°	36°
Color Temperature:	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K
Color Rendering Index:	80	80	80	80
Operating Temperature:	-10~45°C	-10~45°C	-10~45°C	-10~45°C
Input:	AC220V	AC220V	AC220V	AC220V
Output:	300mA/21~23V	300mA/23V	300mA/36~39V	450mA/36~39V








Luminaire Structure

- Die-casting aluminium and PC housing with powder coating
- Die-casting aluminium heat sink with excellent thermal management
- Remote driver is included
- Long life span up to 50,000hrs

Ring Color



Technical information

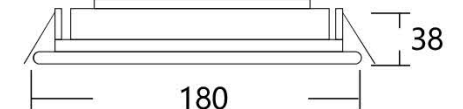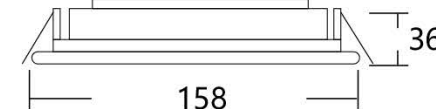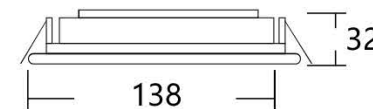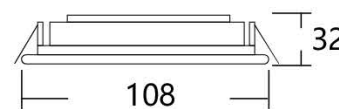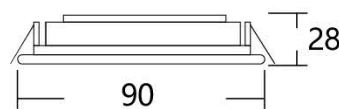

Item Number:	VLL9028	VLL10832	VLL13832	VLL15836	VLL180160
Light source:	COB	COB	COB	COB	COB
Power:	7W	10W	18W	24W	35W
Size:	Φ90*H28mm	Φ108*H32mm	Φ138*H32mm	Φ158*H36mm	Φ180*H38mm
Cutout:	Φ75mm	Φ95mm	Φ120mm	Φ140mm	Φ160mm
Beam Angle:	24°	24°	24°	24°	24°
Color Temperature:	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K	3000/4000K/6000K
Color Rendering Index:	80	80	80	80	80
Operating Temperature:	-10~45°C	-10~45°C	-10~45°C	-10~45°C	-10~45°C
Input:	AC220V	AC220V	AC220V	AC220V	AC220V
Output:	300mA/21~23V	300mA/23V	300mA/36~39V	450mA/36~39V	550mA/36~39V

